


R128 MULTISTAGE SUBMERSIBLE PUMP

Performance Table

Type Single Phase 220 - 240V	Motor		Input kW	Current A	Capacitor		Flowrate							
	HP	kW			μF	V _{AC}	m ³ /h	0	1.5	3	4	5.1	5.8	6.3
			Total Head in Meters											
R128A 40	0.8	0.6	1	4.5	20	450	Head in Meters	40	32	25	22	15	14	11
R128A 60	1.2	0.9	1.4	7.2	25	450		60	50	40	33	25	20	18
R128A 80	1.6	1.2	1.8	9.0	35	450		80	68	55	45	34	26	20



R128A Pump Performance Curve

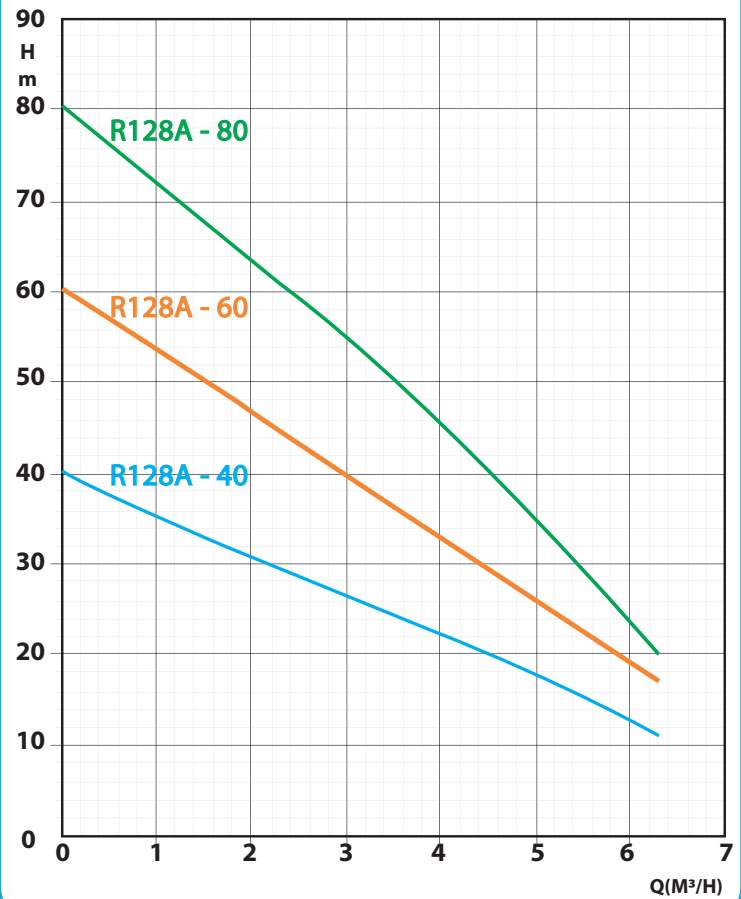

Features

- High quality mechanical seal
- High efficiency
- In-built Capacitor
- Integral thermal protection
- Prolonged Service Life
- In-built float switch
- Stainless Steel Impeller
- Bottom Suction
- Effective Motor Cooling
- 15m Extended Cable